


## DETUMANDO S.L



### PROGRAMMABLE DOOR OPENER DTM-ROLL 433 or 868

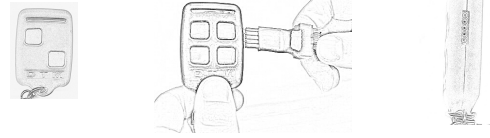

#### PRODUCT DESCRIPTION

The door opener remote the customer has acquired it is part of DTM top-quality products (Detumando S.L.). They are exclusively used for activating automations to open and close garage doors and similar. These top-quality products are formed by **DTM with rolling code (DTM-ROLL)**. Each model is made of 2 and 4 channels or buttons; they are used for being functional as compatible of receivers of the following brands, no matter they have installer code or not: APRIMATIC TR2, BFT,CLEMSA MUTANCODE, ERREKA, MATICDOOR MILENY, ROPER, NICE SMILO, JCM, PUJOL VARIO OCEAN, GIBIDI, DEA SYSTEM, FORSA, DMIL, MASTER INGENIEROS, NUEVA CASTILLA, ELEMAT, ZIBOR, HYDOM, EMFA, CUBELLS, ALFA TORRES, ELECTRO PARKING, EP, NEO, ARF 2, HIBRID PLUS, CYACSA.

**Available in 2 and 4 buttons**

#### PROGRAMMING

It has to be programmed with the RF **PLUS and ROLLING PLUS**.

It only can be duplicated the indicated door openers, no matter they have installer code or not.

#### WITH THE RF PLUS:

To program the **DTM-ROLL 433 or DTM-ROLL 868**, follow the next steps:

1. - Plug in the five pins socket to the four pins male, place the black mark upward, leaving the pin socket free( See Fig. A and B). 2. - Place the original door opener on the TX AREA and check that it emits a sound to transmit. 3. - Press and keep pressing the button A in the **RF PLUS**, the upper light on the right will turn on and off quickly; keep pressing and start to transmit with the original door opener till the light turn off. 4. - Follow the same instructions than in step 3, but this time by keeping pressed button B in the **RF PLUS**. 5.- Press button C, the light in the **RF PLUS** will flicker quickly and then it will turn on after few seconds( 5 or 6 seconds) then it will keep on, on the contrary, please repeat all the steps again. 6.- To continue or repeat, press ENTER after duplication.

#### WITH THE ROLLING PLUS:

Find in the ROLLING PLUS manual the process to follow, according to the brand the customer wants to duplicate.

#### TECHNICAL CHARACTERISTICS

- BRAND: DETUMANDO S.L
- MODEL: DTM-ROLL
- CHANNELS: 2 y 4
- MICROSWITCH: -----
- FREQUENCY: 433.93 y 868.35
- TYPE OF BATTERY: 12 V
- DUPLICATE WITH: DTM-ROLL 433 or 868(according to the case)